



Phone: (701) 280-0187  
Fax: (701) 280-9021

**Moorhead Area Public Schools Improvements  
High School Track Replacement and Artificial Turf Installation  
Moorhead, Minnesota**

**Project No.** 13-043  
**Date:** February 27, 2014

**BID DATE & TIME:** Tuesday, March 4, 2014 at 2:00 pm

### **ADDENDUM No. 1**

**The following additions, clarifications, deletions and/or changes shall be made to the SPECIFICATIONS:**

#### **Section 00 4100 - Bid Proposal Form**

1. Delete Section 00 4100 Proposal Form: Replace with revised Section 00 4100 attached with this document.

**The following attachment for additions, deletions and/or changes shall be made to the CIVIL ENGINEERING DRAWINGS and SPECIFICATIONS:**

**END OF ARCHITECTUAL ADDENDUM No. 1**

**SECTION 00 4100  
PROPOSAL FORM**

**Project:**

Moorhead Area Public Schools Improvements  
High School Track Replacement and Artificial Turf Field Installation  
Moorhead, Minnesota

**Date: March 4, 2014**

Proposal of \_\_\_\_\_, hereinafter called the bidder, a

\_\_\_\_\_ corporation / partnership / an individual, doing business as  
(State) (strike out inapplicable terms)

\_\_\_\_\_ to Moorhead Area Public Schools District 152, hereinafter  
called the Owner.

**To the Owner:**

The bidder in compliance with the Invitation for Bids for the construction of the Moorhead Area Public Schools Improvements High School Track Replacement and Artificial Turf Field Installation having examined the plans and specifications with related documents and the site of the proposed work and being familiar with all of the conditions surrounding the construction of the proposed project including the availability of materials and labor, hereby proposes to furnish all labor, materials, and supplies and to construct the project in accordance with the contract documents within the time set forth therein and at the prices stated below. These prices are to cover all expenses incurred in performing the work required under the contract documents of which this proposal is a part.

Bidder hereby agrees to commence work under this contract on or before a date noted in the Project Construction Schedule included in these specifications and to fully complete the project in the time allotted by this same schedule.

Bidder acknowledges receipt of the following addenda: \_\_\_\_\_.

**BASE PROPOSAL:**

Bidder agrees to perform all of the Construction Work described in the specifications and shown on the plans for the following Bid Package(s) for the sum of money as noted following each Bid package: (Contractors are required to submit individual bids for each Bid Package. Bidders are allowed to submit combined bids as well.)

**BID PACKAGE**

Number/Name	Amount of Bid
# _____	\$ _____
# _____	\$ _____
# _____	\$ _____
# _____	\$ _____

# \_\_\_\_\_ \$ \_\_\_\_\_

**ALTERNATE PROPOSALS:**

Alternate No. 1 - All work associated with providing the field events as indicated in the drawings and specifications.

Add/Deduct\$ \_\_\_\_\_

Alternate No. 2 - All work associated with providing field fencing as indicated in the drawings and specifications.

Add/Deduct\$ \_\_\_\_\_

Alternate No. 3 - All work associated with providing a fence enclosure at the stadium as indicated in the drawings and specifications.

Add/Deduct\$ \_\_\_\_\_

Alternate No. 4 - All work associated with providing the school logo at the center field as indicated in the drawings and specifications.

Add/Deduct\$ \_\_\_\_\_

Alternate No. 5 - All work associated with providing football field end zone lettering as indicated in the drawings and specifications.

Add/Deduct\$ \_\_\_\_\_

Bidder understands that the Owner reserves the right to reject any or all bids and to waive any informality in the bidding.

The bidder agrees that this bid shall be good and may not be withdrawn for a period of 30 days after the scheduled closing time for receiving bids.

Upon receipt of written notice of acceptance of this bid, bidder will execute the formal contract attached within 10 days and deliver a surety bond or bonds as required by the specifications.

Respectfully submitted,

By \_\_\_\_\_

(signature)

Title \_\_\_\_\_

Business Address \_\_\_\_\_

(SEAL if bid is by a Corporation)

\_\_\_\_\_  
Telephone No. \_\_\_\_\_

Fax No. \_\_\_\_\_

E-Mail \_\_\_\_\_

**END OF SECTION**



February 24, 2014

**PROJECT**

Moorhead Area Public Schools Improvements High School Track Replacement and Artificial Turf Field Installation  
Moorhead, Minnesota

**BID DATE: March 4, 2014**

**ADDENDUM NO.1**

Drawings and Project Specification Manual for the above referenced project are hereby revised in accordance with the items set forth herein. This Addendum supersedes and supplements all portions of the Bidding Documents with which it conflicts.

Receipt of this Addendum shall be acknowledged by entering this Addendum number on your proposal.

The following are changes or additions to the Bidding Documents dated **February 15, 2014.**

***PRIOR APPROVALS***

**Section 32 1815 – Artificial Grass – Base/Drainage**

1. 2.02.B – 12" Multi-Flow: Manufactured by Varicore Technologies

***CHANGES TO THE DRAWINGS***

**Sheet C6.0 – Details**

1. See attached sheet R1/C6.0. Detail 13/C6.0 has been revised to show only 9 gauge tension wire along bottom of fence and no bottom rail.

***CHANGES TO THE SPECIFICATIONS***

**Section 32 1815 – Artificial Grass – Base/Drainage**


1. Add Section 2.04.F
  - F. Synthetic Turf Drainage Stone – Fill type 5B: Base Stone
    1. Graded in Accordance with ASTM C136, within the following limits:
      - a. 1.5" sieve: 100 percent passing
      - b. 1" sieve: 90 to 100 percent passing
      - c. 3/4" sieve: 80 to 100 percent passing
      - d. 1/2" sieve: 75 to 90 percent passing
      - e. 3/8" sieve: 50 to 85 percent passing
      - f. No.4 sieve: 30 to 65 percent passing

- g. No. 8 sieve: 20 to 50 percent passing
- h. No. 16 sieve: 10 to 40 percent passing
- i. No. 30 sieve: 0 to 35 percent passing
- j. No. 100 sieve: 0 to 8 percent passing
- k. No. 200 sieve: 0 to 2 percent passing
- 2. Material proposed for Base Stone shall be approved by synthetic turf manufacturer and install prior to placement.

2. Add Section 2.05.D

D. Synthetic Turf Drainage Stone – Fill Type 5A: Finishing Stone

- 1. Graded in Accordance with ASTM C136, within the following limits:
  - a. 1/2" sieve: 100 percent passing
  - b. 3/8" sieve: 85 to 100 percent passing
  - c. No. 4 sieve: 65 to 100 percent passing
  - d. No. 8 sieve: 40 to 75 percent passing
  - e. No. 16 sieve: 25 to 55 percent passing
  - f. No. 30 sieve: 10 to 36 percent passing
  - g. No. 100 sieve: 1 to 12 percent passing
  - h. No. 200 sieve: 0 to 5 percent passing
- 2. Material proposed for Base Stone shall be approved by synthetic turf manufacturer and install prior to placement.

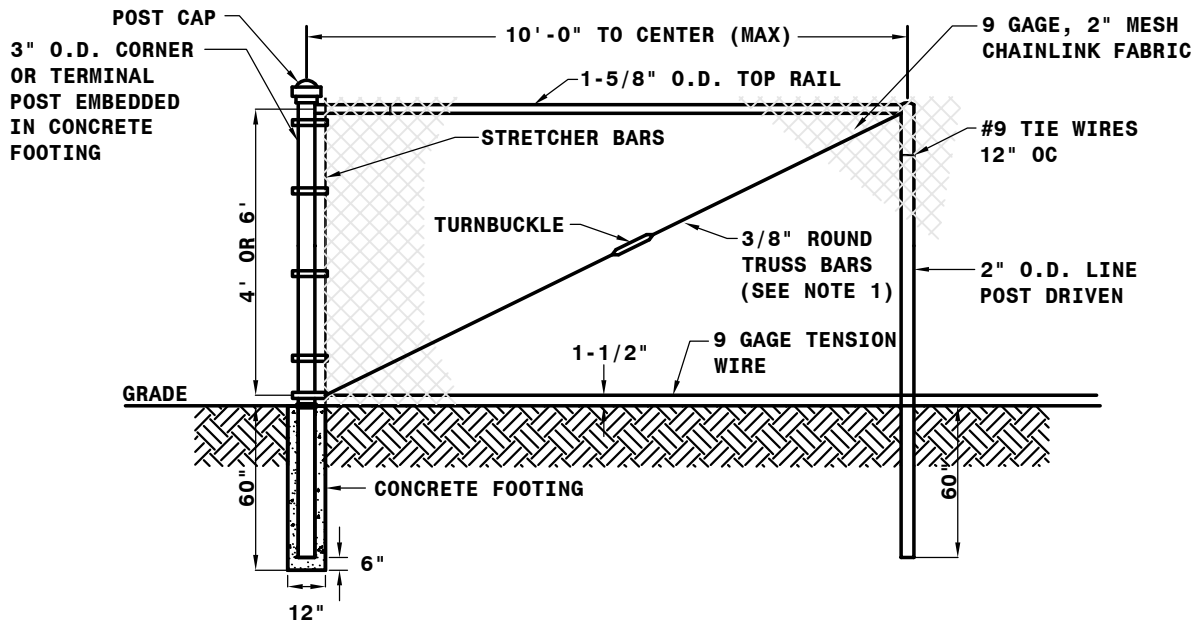

**NOTE:**

1. TRUSS BARS ARE REQUIRED FOR EACH GATE SECTION AND THE FIRST SPAN ON EACH SIDE OF A CORNER POST ONLY.

**13 4' OR 6' CHAIN LINK FENCE DETAIL (BY 32B)**  
**C6.0 NOT-TO-SCALE**